

Φ2.4x7mm, RoHS Compliant & Pb-Free
MICROFUSE (MEDIUM SLOW-BLOW)
 微型保险丝管 (中等慢断型)

INTERRUPTING CAPACITY / 分断能力:

50 amperes at 125V/250V AC (200mA-10A)

100 amperes at 125V AC (1A-5A) PSE

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A ² Sec.) (RoHS) I ² T 参考值	
		CCC		UL(cUL)		CSA			PSE
		H	L	H	L	H	L		L
20S-0200H/L	200mA	●	●	●	●	●	●	0.01230	
20S-0250H/L	250mA	●	●	●	●	●	●	0.02431	
20S-0300H/L	300mA	●	●	●	●	●	●	0.03270	
20S-0315H/L	315mA	●	●	●	●	●	●	0.03671	
20S-0350H/L	350mA	●	●	●	●	●	●	0.04738	
20S-0375H/L	375mA	●	●	●	●	●	●	0.06790	
20S-0400H/L	400mA	●	●	●	●	●	●	0.08190	
20S-0500H/L	500mA	●	●	●	●	●	●	0.1543	
20S-0600H/L	600mA	●	●	●	●	●	●	0.1591	
20S-0630H/L	630mA	●	●	●	●	●	●	0.2808	
20S-0700H/L	700mA	●	●	●	●	●	●	0.3874	
20S-0750H/L	750mA	●	●	●	●	●	●	0.4989	
20S-0800H/L	800mA	●	●	●	●	●	●	0.6133	
20S-010H/L	1A	●	●	●	●	●	●	0.9903	
20S-012H/L	1.2A	●	●	●	●	●	●	1.435	
20S-013H/L	1.25A	●	●	●	●	●	●	1.749	
20S-015H/L	1.5A	●	●	●	●	●	●	2.002	
20S-016H/L	1.6A	●	●	●	●	●	●	2.374	
20S-020H/L	2A	●	●	●	●	●	●	4.334	
20S-023H/L	2.25A	●	●	●	●	●	●	6.002	
20S-025H/L	2.5A	●	●	●	●	●	●	7.569	
20S-030H/L	3A	●	●	●	●	●	●	11.64	
20S-032H/L	3.15A	●	●	●	●	●	●	12.20	
20S-035H/L	3.5A	●	●	●	●	●	●	15.72	
20S-040H/L	4A	●	●	●	●	●	●	20.88	
20S-050H/L	5A	●	●	●	●	●	●	42.76	
20S-060H/L	6A	●	●	●	●	●	●	58.61	
20S-063H/L	6.3A	●	●	●	●	●	●	67.99	
20S-070H/L	7A	●	●	●	●	●	●	92.44	
20S-080H/L	8A	●	●	●	●	●	●	74.48	
20S-090H/L	9A	●	●	●	●	●	●	93.07	
20S-100H/L	10A	●	●	●	●	●	●	153.6	

● DENOTES FOR APPROVED

H DENOTES FOR 250V

L DENOTES FOR 125V

● 表示已取得安全认证

H 代表 250V


L 代表 125V

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4 小时
200%	60 seconds Max. 最慢 60 秒

PACKING/ 包装:

1. INNER BOX/ 内盒 : AMMO PACK

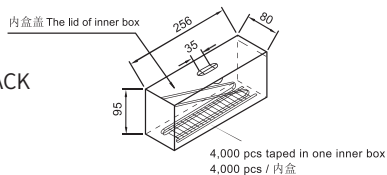


Unit 单位: mm

2. OUTER CARTON/ 外箱 : 10 INNER BOXES / CARTON
 CARTON SIZE / 尺寸 : L440x W270 x H230(mm)

Dimensions/ 尺寸:

Unit 单位: mm

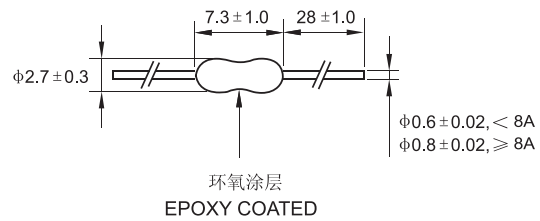

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

**20S AVERAGE I-T CHARACTERISTICS CURVE
 (FOR REFERENCE ONLY)**

20S 平均 I-T 曲线图 (仅供参考)

