

2410, RoHS Compliant & Pb-Free
SMD NANO FUSE (FAST-BLOW)
方型超微表面贴片式保险丝 (速断型)

INTERRUPTING CAPACITY / 分断能力:

50A at 250V AC (200mA-10A) , 50A at 125V AC/DC (12A-20A, 1A-5A),
100A at 125V AC/DC (200mA-10A) , 100A at 65V DC (12A-20A), 100A at
250V AC(1A-5A)

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		CQC		UR/cUR			TUV	
		H	L1	H	L1	L2	H	
25F -0200H/L1	200mA			●	●			0.008
25F -0250H/L1	250mA			●	●			0.012
25F -0315H/L1	315mA			●	●			0.031
25F -0375H/L1	375mA			●	●			0.067
25F -0400H/L1	400mA			●	●			0.073
25F -0500H/L1	500mA			●	●			0.101
25F -0630H/L1	630mA			●	●			0.188
25F -0750H/L1	750mA			●	●			0.315
25F -0800H/L1	800mA			●	●			0.335
25F -010H/L1	1A	●	●	●	●		●	0.34
25F -012H/L1	1.2A			●	●			0.49
25F -013H/L1	1.25A	●	●	●	●		●	0.52
25F -015H/L1	1.5A			●	●			0.93
25F -016H/L1	1.6A	●	●	●	●		●	0.97
25F -020H/L1	2A	●	●	●	●		●	1.92
25F -025H/L1	2.5A	●	●	●	●		●	3.38
25F -030H/L1	3A			●	●			3.95
25F -032H/L1	3.15A	●	●	●	●		●	4.01
25F -035H/L1	3.5A			●	●			5.26
25F -040H/L1	4A	●	●	●	●		●	7.81
25F -050H/L1	5A	●	●	●	●		●	12.22
25F -063H/L1	6.3A			●	●			7.01
25F -070H/L1	7A			●	●			8.36
25F -080H/L1	8A			●	●			12.81
25F -100H/L1	10A			●	●			19.03
25F -120L1/L2	12A			●	●	●		35.62
25F -150L1/L2	15A			●	●	●		70.997
25F -200L1/L2	20A			●	●	●		102.3



● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V H 代表 250V
L1 DENOTES FOR 125V L1 代表 125V
L2 DENOTES FOR 65V L2 代表 65V

ELECTRICAL CHARACTERISTICS/ 电气特性:


% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min. 最快 4 小时	(200mA-20A)
125%	1 hours Min. 最快 1 小时	(1A-5A)
200%	5 seconds Max. 最慢 5 秒	(200mA-10A)
	20 seconds Max. 最慢 20 秒	(12A-20A)
1000%	0.001S-0.01S	(1A-5A)

Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~125°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 240°C ±5°C, 30s±5s
Solderability/ 可焊性: MIL-STD-202, Method 208

Dimensions/ 尺寸



Land Pattern:




Unit 单位: mm

PACKING/ 包装:

1,000 PIECES TAPED AND REELED IN ONE BOX
每卷 1,000 只保险丝, 装入一个包装盒

BOX SIZE/ 包装盒尺寸:

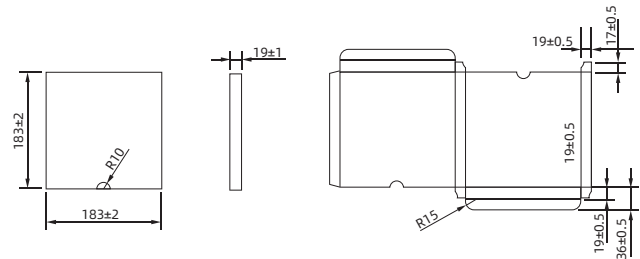

Unit 单位: mm

**25F AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)**

25F 平均 I-T 曲线图 (仅供参考)

