

## Φ3.6x10mm, RoHS Compliant FAST-BLOW MICROFUSE 速断型保险丝管

**INTERRUPTING CAPACITY / 分断能力:**  
50 amperes at 125V/250V/350V AC (100mA-15A)  
100 amperes at 125V/250V AC (1A-5A) PSE

### TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证									REFERENCE (A <sup>2</sup> Sec.) (RoHS) I <sup>2</sup> T 参考值
		UL(cUL)			CSA			PSE			
		H <sub>1</sub>	H <sub>2</sub>	L	H <sub>1</sub>	H <sub>2</sub>	L	H <sub>2</sub>	L		
30N-0200H <sub>1</sub> /H <sub>2</sub> /L	200mA										0.02502
30N-0250H <sub>1</sub> /H <sub>2</sub> /L	250mA										0.03852
30N-0300H <sub>1</sub> /H <sub>2</sub> /L	300mA										0.06389
30N-0315H <sub>1</sub> /H <sub>2</sub> /L	315mA										0.08730
30N-0350H <sub>1</sub> /H <sub>2</sub> /L	350mA										0.1118
30N-0375H <sub>1</sub> /H <sub>2</sub> /L	375mA										0.1426
30N-0400H <sub>1</sub> /H <sub>2</sub> /L	400mA										0.1488
30N-0500H <sub>1</sub> /H <sub>2</sub> /L	500mA										0.2581
30N-0600H <sub>1</sub> /H <sub>2</sub> /L	600mA										0.1189
30N-0630H <sub>1</sub> /H <sub>2</sub> /L	630mA										0.1279
30N-0700H <sub>1</sub> /H <sub>2</sub> /L	700mA										0.1680
30N-0750H <sub>1</sub> /H <sub>2</sub> /L	750mA										0.1978
30N-0800H <sub>1</sub> /H <sub>2</sub> /L	800mA										0.2285
30N-010H <sub>1</sub> /H <sub>2</sub> /L	1A										0.4373
30N-012H <sub>1</sub> /H <sub>2</sub> /L	1.2A										0.6019
30N-013H <sub>1</sub> /H <sub>2</sub> /L	1.25A										0.6261
30N-015H <sub>1</sub> /H <sub>2</sub> /L	1.5A										0.9885
30N-016H <sub>1</sub> /H <sub>2</sub> /L	1.6A										1.159
30N-020H <sub>1</sub> /H <sub>2</sub> /L	2A										2.297
30N-023H <sub>1</sub> /H <sub>2</sub> /L	2.25A										2.919
30N-025H <sub>1</sub> /H <sub>2</sub> /L	2.5A										2.152
30N-030H <sub>1</sub> /H <sub>2</sub> /L	3A										3.005
30N-032H <sub>1</sub> /H <sub>2</sub> /L	3.15A										4.174
30N-035H <sub>1</sub> /H <sub>2</sub> /L	3.5A										5.182
30N-040H <sub>1</sub> /H <sub>2</sub> /L	4A										5.712
30N-050H <sub>1</sub> /H <sub>2</sub> /L	5A										10.55
30N-060H <sub>1</sub> /H <sub>2</sub> /L	6A										15.84
30N-063H <sub>1</sub> /H <sub>2</sub> /L	6.3A										18.58
30N-070H <sub>1</sub> /H <sub>2</sub> /L	7A										23.32
30N-080H <sub>1</sub> /H <sub>2</sub> /L	8A										38.20
30N-090H <sub>1</sub> /H <sub>2</sub> /L	9A										54.34
30N-100H <sub>1</sub> /H <sub>2</sub> /L	10A										75.76
30N-120H <sub>1</sub> /H <sub>2</sub> /L	12A										110.4
30N-150H <sub>1</sub> /H <sub>2</sub> /L	15A										250.9

● DENOTES FOR APPROVED      ● 表示已取得安全认证  
H<sub>1</sub> DENOTES FOR 350V      H<sub>1</sub> 代表 350V  
H<sub>2</sub> DENOTES FOR 250V      H<sub>2</sub> 代表 250V  
L DENOTES FOR 125V      L 代表 125V


### ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min.      最快 4 小时
200%	60 seconds Max.      最慢 60 秒

**Standards/ 标准:** UL 248-1, UL 248-14  
**Operating Temperature/ 工作温度:** -55°C ~125°C  
**Storing Temperature/ 储存温度:** -55°C ~85°C  
**Resistance to soldering heat/ 耐焊接热性:** 260°C, 10s Max.  
**Solderability/ 可焊性:** 245°C ±5°C, 5s±0.5s


### Dimensions/ 尺寸:

Unit 单位: mm

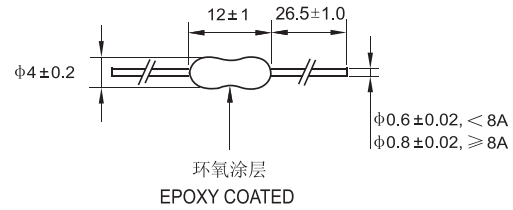

### PACKING/ 包装:

1. INNER BOX/ 内盒: AMMO PACK

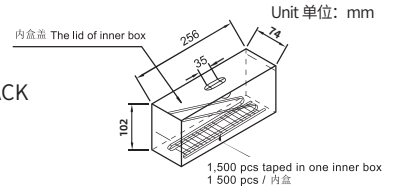

2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON  
CARTON SIZE / 尺寸: L400x W220 x H230(mm)

### 30N AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

### 30N 平均 I-T 曲线图 (仅供参考)

