



Ⓜ 31NM, 32NM

Φ3.6x10mm, RoHS Compliant & Pb-Free
GLASS TUBE MICROFUSE (FAST-BLOW)
玻璃保险丝管 (速断型)

INTERRUPTING CAPACITY / 分断能力:

50 amperes at 125V AC (100mA-15A)
50 amperes at 250V AC (100mA-15A)

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证					REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		UL		cUL		CSA	
		H	L	H	L	L	
31NM,32NM-0300H/L	300mA	●	●	●	●	●	0.07196
31NM,32NM-0315H/L	315mA	●	●	●	●	●	0.08236
31NM,32NM-0350H/L	350mA	●	●	●	●	●	0.09546
31NM,32NM-0375H/L	375mA	●	●	●	●	●	0.1172
31NM,32NM-0400H/L	400mA	●	●	●	●	●	0.1389
31NM,32NM-0500H/L	500mA	●	●	●	●	●	0.09975
31NM,32NM-0600H/L	600mA	●	●	●	●	●	0.1354
31NM,32NM-0630H/L	630mA	●	●	●	●	●	0.1422
31NM,32NM-0750H/L	750mA	●	●	●	●	●	0.1956
31NM,32NM-0800H/L	800mA	●	●	●	●	●	0.2463
31NM,32NM-010H/L	1A	●	●	●	●	●	0.3606
31NM,32NM-012H/L	1.2A	●	●	●	●	●	0.5181
31NM,32NM-013H/L	1.25A	●	●	●	●	●	0.5728
31NM,32NM-015H/L	1.5A	●	●	●	●	●	0.8601
31NM,32NM-016H/L	1.6A	●	●	●	●	●	1.115
31NM,32NM-020H/L	2A	●	●	●	●	●	2.189
31NM,32NM-023H/L	2.25A	●	●	●	●	●	2.463
31NM,32NM-025H/L	2.5A	●	●	●	●	●	1.911
31NM,32NM-030H/L	3A	●	●	●	●	●	3.420
31NM,32NM-032H/L	3.15A	●	●	●	●	●	3.833
31NM,32NM-035H/L	3.5A	●	●	●	●	●	5.155
31NM,32NM-040H/L	4A	●	●	●	●	●	5.891
31NM,32NM-050H/L	5A	●	●	●	●	●	9.401
31NM,32NM-060H/L	6A	●	●	●	●	●	16.34
31NM,32NM-063H/L	6.3A	●	●	●	●	●	20.59
31NM,32NM-070H/L	7A	●	●	●	●	●	26.03
31NM,32NM-080H/L	8A	●	●	●	●	●	30.86
31NM,32NM-090H/L	9A	●	●	●	●	●	46.89
31NM,32NM-100H/L	10A	●	●	●	●	●	59.32
31NM,32NM-120H/L	12A	●	●	●	●	●	92.27
31NM,32NM-150H/L	15A	●	●	●	●	●	243.7

● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V H 代表 250V
L DENOTES FOR 125V L 代表 125V
cUL APPROVAL IS EQUIVALENT TO CSA APPROVAL
cUL 认证同等 CSA 认证使用


Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~125°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.
Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4 小时
200%	60 seconds Max. 最慢 60 秒

Dimensions/ 尺寸:

Unit 单位: mm

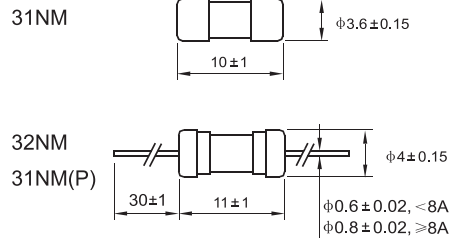

31NM/32NM AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

31NM/32NM 平均 I-T 曲线图 (仅供参考)

