



HC10gG 0.5A-32A

Class of Operation:gG
保护特性: gG




Standard/ 标准: IEC 60269, GB 13539

INTERRUPTING CAPACITY / 分断能力:

120,000 A at 400V AC (32A)
120,000 A at 500V AC (0.5A-25A)
80,000 A at 690V AC (0.5A-16A)

Dimensions/ 尺寸:

Unit 单位: mm

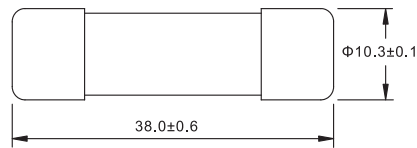

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		CCC	
10gG0.5U5/U6	500mA	○	
10gG1U5/U6	1A	○	
10gG2U5/U6	2A	●	
10gG4U5/U6	4A	●	
10gG6U5/U6	6A	●	
10gG8U5/U6	8A	●	
10gG10U5/U6	10A	●	
10gG12U5/U6	12A	●	
10gG16U5/U6	16A	●	
10gG20U5	20A	●	
10gG25U5	25A	●	
10gG32U4	32A	○	

U4 DENOTES FOR 400V AC
U5 DENOTES FOR 500V AC
U6 DENOTES FOR 690V AC
● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING


U4 表示 400V AC
U5 表示 500V AC
U6 表示 690V AC
● 表示已取得安全认证
○ 表示正在申请安全认证

ELECTRICAL CHARACTERISTICS/ 电气特性:

RATING 额定	CONVENTIONAL TIME 约定时间	CONVENTIONAL CURRENT 约定电流	
		CONVENTIONAL NON-FUSING CURRENT(A) 约定不熔断电流	CONVENTIONAL FUSING CURRENT(A) 约定熔断电流
$I_n \leq 4A$	1h	1.5I _n	2.1I _n
4A < I _n < 16A	1h	1.5I _n	1.9I _n
16 ≤ I _n ≤ 32A	1h	1.25I _n	1.6I _n

HC10gG 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

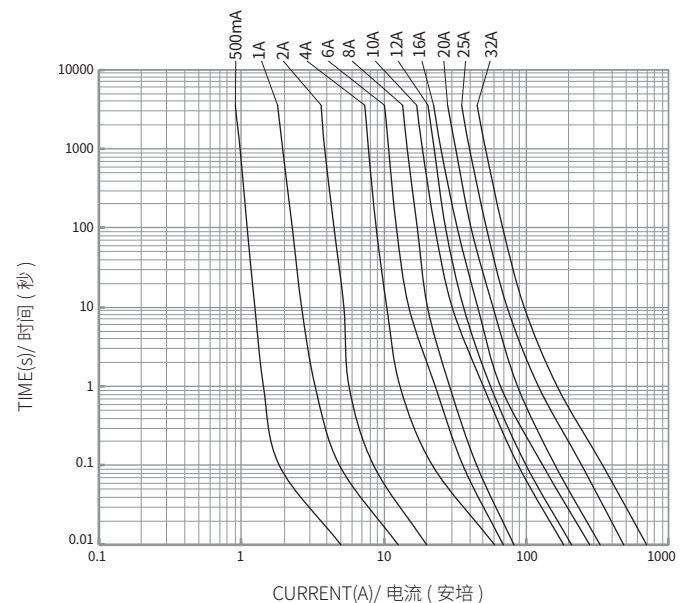

Recommended fuseblocks/fuseholders for 10.3mmx38mm fuses

See Model of product: HC101A HC101D HF-103D HF-104A

适用于 10.3mmx38mm 熔断体的支持件

详见产品型号: HC101A HC101D HF-103D HF-104A

