



NH000gG 500V 2A-100A

Class of Operation:gG

保护特性: gG




Standard/ 标准: IEC 60269, GB 13539

INTERRUPTING CAPACITY/ 分断能力:
120,000 A at 500V AC(2A-100A)

Dimensions/ 尺寸:

Unit 单位: mm

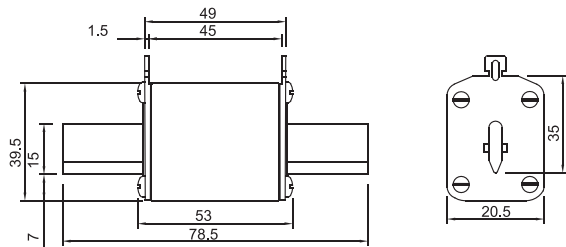

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		CCC	
000gG2U5	2A	○	○
000gG4U5	4A	○	○
000gG6U5	6A	●	●
000gG8U5	8A	●	●
000gG10U5	10A	●	●
000gG12U5	12A	●	●
000gG16U5	16A	●	●
000gG20U5	20A	●	●
000gG25U5	25A	●	●
000gG32U5	32A	●	●
000gG40U5	40A	●	●
000gG50U5	50A	●	●
000gG63U5	63A	●	●
000gG80U5	80A	●	●
000gG100U5	100A	●	●

U5 DENOTES FOR 500V AC
● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING

U5 表示 500V AC
● 表示已取得安全认证
○ 表示正在申请安全认证

ELECTRICAL CHARACTERISTICS/ 电气特性:

Rated Current In(A) 额定电流 In(A)	CONVENTIONAL TIME(H) 约定时间	CONVENTIONAL CURRENT 约定电流	
		CONVENTIONAL NON-FUSING CURRENT(A) 约定不熔断电流	CONVENTIONAL FUSING CURRENT(A) 约定熔断电流
2A ≤ In ≤ 4A	1h	1.5In	2.1In
6A ≤ In ≤ 12A	1h	1.5In	1.9In
16A ≤ In ≤ 63A	1h	1.25In	1.6In
80A ≤ In ≤ 100A	2h	1.25In	1.6In

Recommended fuse-base for NH000/NH00 fuses

See Model of product: NH00B


适用于 NH000/NH000 熔断体的支持件

详见产品型号: NH00B



NH000gG 500V 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

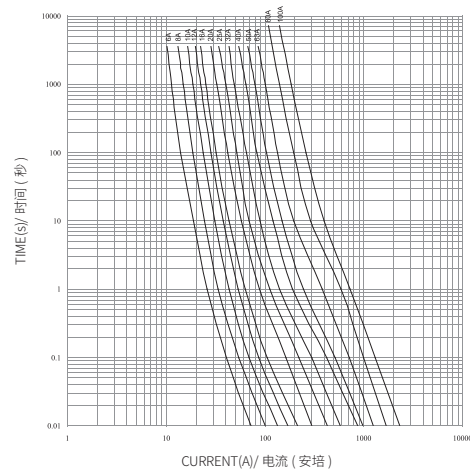

NH000gG 500V~ 截断电流曲线图 (仅供参考)

CUT-OFF CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

