



# HC10aM 0.5A-32A

Class of Operation:aM

保护特性: aM



Standard/ 标准: IEC 60269, GB 13539


**INTERRUPTING CAPACITY / 分断能力:**

120,000 A at 500V AC (500mA-20A)

120,000 A at 400V AC (20A-32A)

**Dimensions/ 尺寸:**

Unit 单位: mm

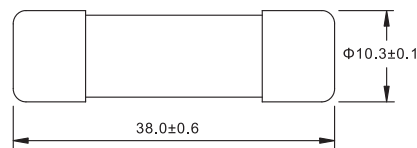

**TECHNICAL PARAMETERS/ 技术参数:**

| PART NO.<br>目录编号 | CURRENT RATING<br>额定电流 | APPROVALS<br>安全认证 |
|------------------|------------------------|-------------------|
|                  |                        | CCC               |
| 10aM0.5U5        | 500mA                  | ●                 |
| 10aM1U5          | 1A                     | ●                 |
| 10aM2U5          | 2A                     | ●                 |
| 10aM4U5          | 4A                     | ●                 |
| 10aM6U5          | 6A                     | ●                 |
| 10aM8U5          | 8A                     | ●                 |
| 10aM10U5         | 10A                    | ●                 |
| 10aM12U5         | 12A                    | ●                 |
| 10aM16U5         | 16A                    | ●                 |
| 10aM20U4         | 20A                    | ●                 |
| 10aM25U4         | 25A                    | ○                 |
| 10aM30U4         | 30A                    | ○                 |
| 10aM32U4         | 32A                    | ○                 |

U4 DENOTES FOR 400V AC  
U5 DENOTES FOR 500V AC  
● DENOTES FOR APPROVAL  
○ DENOTES FOR PENDING


U4 表示 400V AC  
U5 表示 500V AC  
● 表示已取得安全认证  
○ 表示正在申请安全认证

**ELECTRICAL CHARACTERISTICS/ 电气特性:**

|                            | 4In | 6.3In | 8In  | 10In | 12.5In | 19In |
|----------------------------|-----|-------|------|------|--------|------|
| t <sub>熔断</sub> Operating  | —   | 60s   | —    | —    | 0.5s   | 0.1s |
| t <sub>弧前</sub> Pre-arcing | 60s | —     | 0.5s | 0.2s | —      | —    |

**HC10aM 平均 I-T 曲线图 (仅供参考)**

AVERAGE I-T CHARACTERISTICS CURVE  
(FOR REFERENCE ONLY)

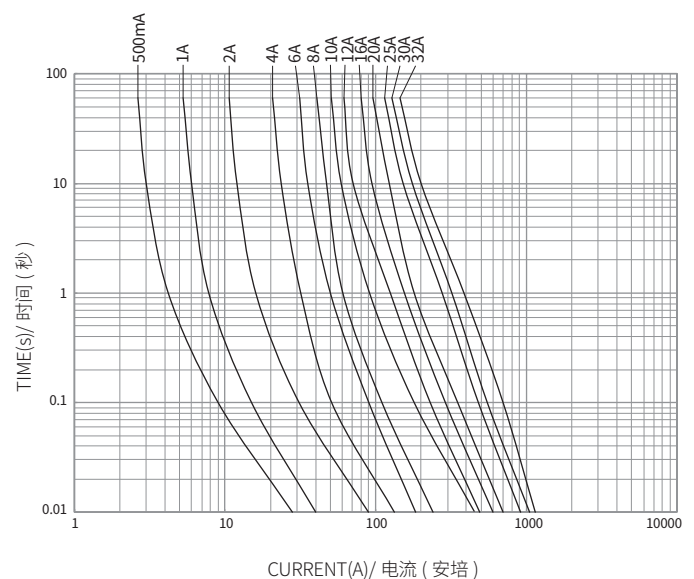

**Recommended fuseblocks/fuseholders for 10.3mmx38mm fuses**

See Model of product: HC101A HC101D HF-103D HF-104A

适用于 10.3mmx38mm 熔断体的支持件

详见产品型号: HC101A HC101D HF-103D HF-104A

